


# PRO GROW


# LED - MODEL X

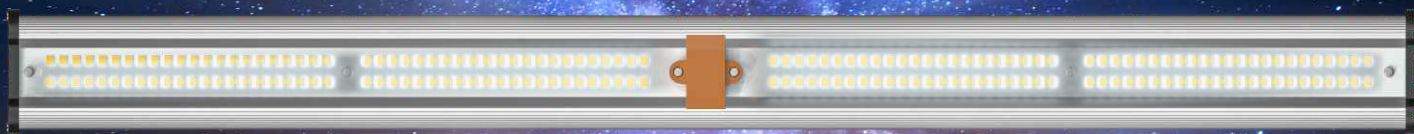

## 60 W 140 $\mu\text{mol/s}$

### PRO GROW LED MODEL X


The PRO GROW LED 60 W Model X LED single bar emits 140  $\mu\text{mol/s}$  of 6,500 K vegetative spectrum with an industry leading CRI of 90. Coupled with ultra-reliable Optimum drivers, these lightweight bars offer cool, fanless & totally silent operation. Extended reliability is assured via IP-65 water resistant, cleanable, 100° clear lenses that protect the diodes from high moisture environments. Compatible light stands are available if required.

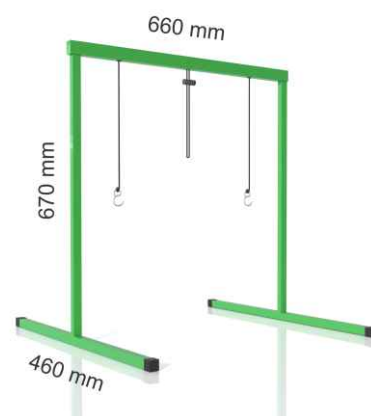

LIGHT STANDS AVAILABLE

- 60 W MODEL X 1 BAR
- Philips 6500 K Blue Diodes
- Optimum Driver
- LED Efficacy 2.4  $\mu\text{mol/J}$
- Total PPFD 140  $\mu\text{mol/s}$


PAR SPECTRUM GRAPH

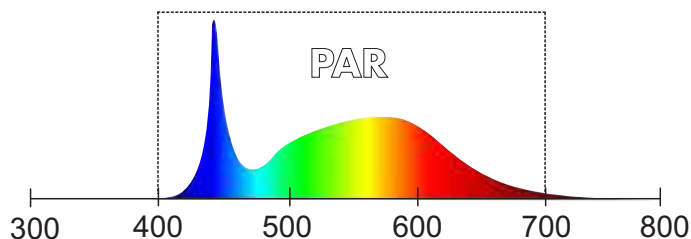

## SPECIFICATIONS

Model:	60 W Model X 1 Bar
Light Source:	184 x Single Mount Diode LEDs
Input Voltage:	100 V - 240 V AC
Frequency Range:	50~60 Hz
Power/Watts:	60 W
Amps	0.25 A
Net Weight:	2.5 kg
Light Beam Angle:	100 Degree
Body Case Material:	Die Cast/Pressed Aluminum
IP Grade:	IP55 (water resistant)
Size:	L-600 mm x W-60 mm x H-60 mm
Lifespan:	>50,000 Hours
Min Operating Temp:	- 40°C
Max Operating Temp:	40°C
Warranty:	3 Year Warranty

## DIMENSIONS

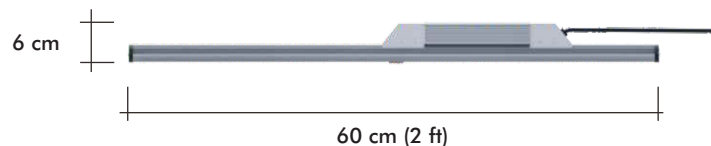


**60 W - 1 BAR**  
**140 umol/s**



## VOLTAGE

VOLTAGE	240 V
AMPERAGE	0.25 A

## MAXIMUM RECOMMENDED LIGHT COVERAGE

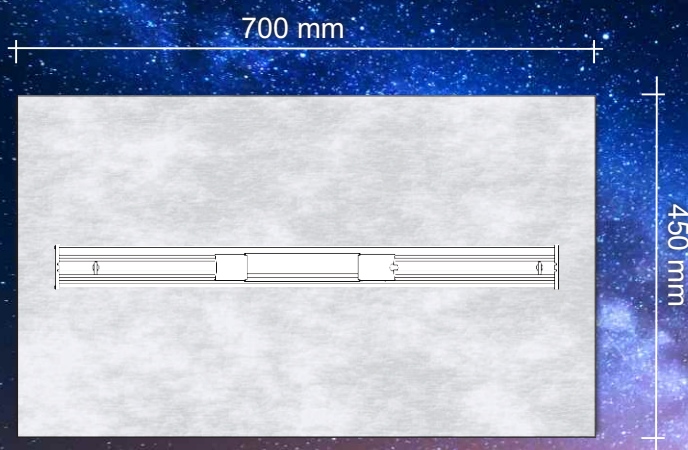

SCAN FOR MORE INFO



[www.progrow.net.au](http://www.progrow.net.au)

